


ICARUS - RECEIVERS

# RX Mini

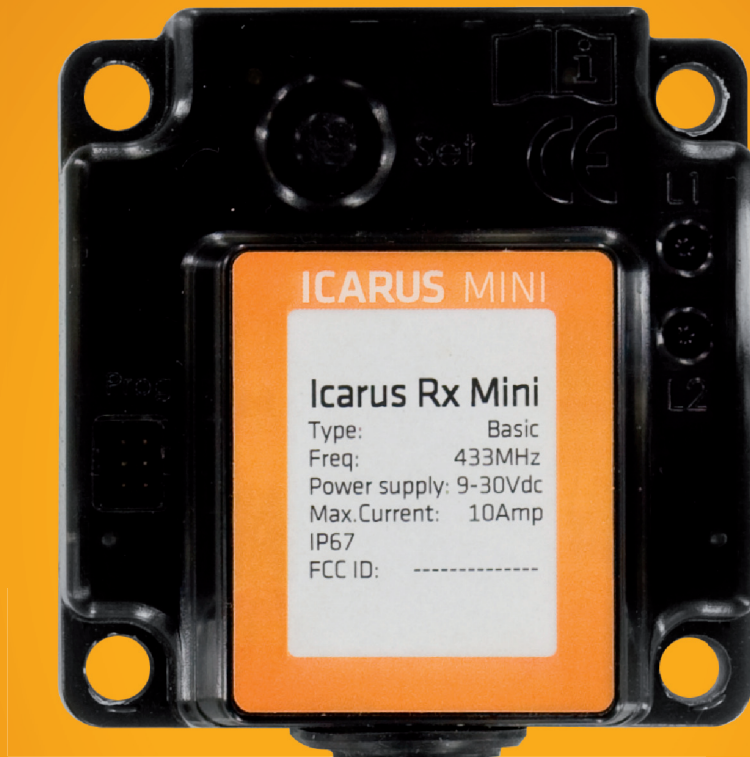

## RX MINI


The RX Mini is the small, compact receiver of the ICARUS family. The potted housing guarantees protection against water and dirt (protective class IP 67) and is extremely sturdy.

Up to 24 transmitters can be logged on and off. At any time, the status as well as the error messages of the recipient can be read out based on the existing LEDs.



## TECHNICAL DATA

# RX Mini

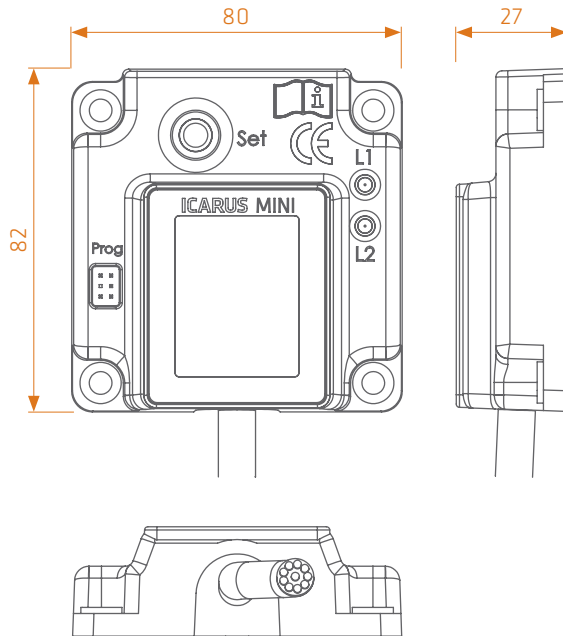

### ICP

INTELLIGENT CREATIVE PRODUCTS GMBH

Manderscheidstraße 8b  
45141 Essen  
Germany

Phone +49 (0)201 5367973  
Fax +49 (0)201 5368293  
E-mail [info@i-c-p.net](mailto:info@i-c-p.net)  
Web [www.i-c-p.net](http://www.i-c-p.net)

### GENERAL

- Frequency: 433MHz
- Sensitivity: -110dBm
- Number of channels: 6
- Number of transmitters: max. 24
- Number of outputs: 6+2 (digital)
- Number of inputs: 2 (digital)
- Max. switching power: 2,5A (per output)
- Reaction time: < 40ms
- Antenna: Internal
- IP protection rating: IP 67
- Voltage: 9-30Vdc
- Energy consumption: < 1W (no output active)
- Max. current: 10A
- Dimensions: 82 × 80 × 27mm
- Weight: Approx. 280g

### WORK AREA

- Range: Approx. 100m (depending on surroundings)
- Temperature: -30°C to +70°C
- Air humidity: 10% - 95%
- Housing material: ABS
- Working altitude: < 2000 m.a.s.l

### ADDITIONAL

- Compatible to Tx Mini and Tx Heavy
- Series connection of receivers possible

### OPTIONAL

- Extern antenna
- Individual software configuration  
using the same hardware



Specifications subject to change without notice.