# TX Heavy



# **TX HEAVY**

The TX Heavy, as the large transmitter of the ICARUS family, is used in all areas in which a high level of reliability and operational safety can be achieved.

Equipped with an emergency shut-off switch, the remote control is appealing due to its long battery service life due to minimal power consumption and through a high level of connection safety.

The sturdy housing fits easily in the hand, is resistance to dirt and water and operation with gloves is no problem.

Different models with two to fourteen buttons cover a wide spectrum of possible applications




TECHNICAL DATA

# TX Heavy

ICP
INTELLIGENT CREATIVE PRODUCTS GMBH

Manderscheidtstraße 8b 45141 Essen Germany

Phone +49 (0)201 5367973 Fax +49 (0)201 5368293 E-mail info@i-c-p.net Web www.i-c-p.net

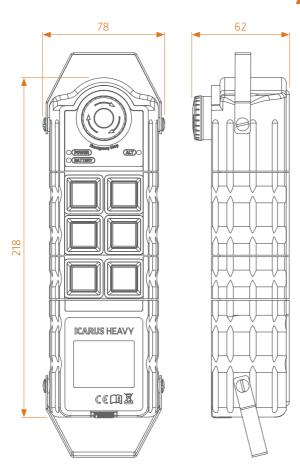

# GENERAL

- Frequency: 433MHz
- Number of channels: 6
- Number of buttons: max. 14
- Transmitter output: <10mW
- Reaction time: < 40ms
- Antenna: Internal
- Batteries: 6x Type AA (normal or rechargeable)
- IP protection rating: IP 54
- Dimensions: 218 × 70 × 62mm (6 buttons)
  - $257 \times 78 \times 62$ mm (6 buttons with clips)
- Weight: 500g (including batteries)

### **WORK AREA**

- Range: Approx. 100m (depending on surroundings)
- Temperature: -20°C to +50°C (depending on the battery)
- Air humidity: 10% 95%
- Housing material: ABS
- Working altitude: < 2000 m.a.s.l

### **ADDITIONAL**

- Compatible to Rx Mini and Rx Heavy
- Emergency stop

## **OPTIONAL**

- battery charger
- Individual software configuration using the same hardware
- 2-14 buttons



Specifications subject to change without notice.